

**CHANGE TO CONTRACT  
CHANGE ORDER NUMBER 1  
2015 SANITARY SEWER IMPROVEMENTS PROJECT  
ALLEY BETWEEN "A" Ave. NE AND "B" Ave. NE, FIRST St. ne TO THIRD St. NE  
FOURTH St. SE FROM "B" Ave. SE TO EOP**

**November 5, 2015**

**OWNER: CITY OF MOUNT VERNON, IOWA  
CONTRACTOR: RICKLEFS EXCAVATING, ANAMOSA, IOWA**

ITEM 1: The existing brick drop manhole at station 6+567.83 was designated to be removed and replaced. Upon excavation and demolition, it was discovered that the existing sanitary sewer main is a 12" VCP sanitary sewer, not a 10" VCP as was shown on the project plans and shown on City Sanitary Sewer Maps. Revisions made in the field included the removal of two sanitary sewer services connecting to the manhole which were tapped into the new length of 12" SDR 26 sanitary sewer pipe.

**1 Ea DROP MANHOLE REVISION @ \$5,415.74/Ea= \$ 5,415.74**

ITEM 2: In an effort to maintain as much slope as possible, Sanitary Sewer alignment revisions were made at the low end of the proposed sanitary sewer on fourth St. SE. This alignment change made it necessary to remove and replace a handicap ramp at the northeasterly intersection quadrant of Fourth St. SE and "B" Ave. SE. There was no bid item in the original contract for ADA trunkated domes, which the Contractor was required to install.

**1 Ea TRUNKATED ADA DOME PANELS @ \$ 280.00/Ea= \$ 280.00**

**ADDITIONAL PRICE TO CONTRACT: \$ 5,695.74**

**ADDITIONAL CONTRACT TIME None**

CONTRACT SUMMARY:

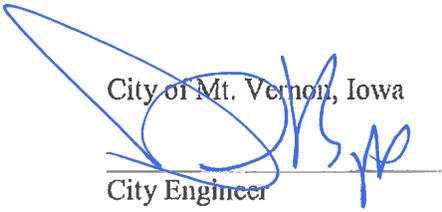
|                        |                    |
|------------------------|--------------------|
| CONTRACT PRICE         | \$ 237,370.00      |
| CHANGE ORDER 1         | <u>\$ 5,695.74</u> |
| REVISED CONTRACT PRICE | \$ 243,065.74      |

Ricklefs Excavating

By: Cory Elwick

Title: Project Manager

Date: 11/6/15

  
City of Mt. Vernon, Iowa  
City Engineer

Date: 11/12/2015

City of Mt. Vernon, Iowa

\_\_\_\_\_  
City Administrator

Date: \_\_\_\_\_