

Henderson Truck Equipment

Henderson Manufacturing, Inc.

916 SOUTH 10TH STREET MANCHESTER, IA 52057 • 888/360-7483 • FAX 563/927-7001

SALES QUOTATION: Munibody Package

Date: 4-3-2014

| | |
|---|----------------------------|
| TO: City of Mount Vernon | FROM: Terry Solomon |
| ATTN: Dean S. / James M. | PHONE: 888-360-7483 |
| FAX: | FAX: 563-927-7001 |
| # OF PAGES: 2 plus install drawing (3 total) | CELL: 563-608-5995 |

I am pleased to quote you the following Henderson equipment package. Please let me know if you have any questions.

Qty: 1 package

11'/12' Henderson Munibody – 36" sides / 48" tailgate

- Trunnion mounted telescopic hoist with nitrided cylinder mounted in front of body, no internal doghouse (body is 11', overall length 12' with cylinder mounted in front of body).
- Recommended cab to single axle = 108" ()
- FRONT CENTER DISCHARGE ONLY. CONVEYOR WILL STOP SHORT OF THE REAR TAILGATE TO ALLOW TAILGATE TO BE LAID DOWN FLUSH WITH TOP OF CONVEYOR FLOOR. REAR APRON HAS BEEN DELETED.
- See attached drawing for required clear frame space for front spinner.
- 30 gallon cradle mounted tank and valve enclosure mounted between cab and body above frame rails.
- Front spinner assembly is adjustable in 3 planes for spread pattern adjustment (in/out, up/down, and arm will swing left/right). Purpose of diverter chute is to divert material away from drive shaft. Rear spinner guard provided.
- Spinner work light installed
- 7 gauge grade 50 sides and ends (65,000 psi tensile strength) with 6" radius and 22 degree slope to conveyor floor.
- 1/4" AR400 conveyor floor (approx 190,000 psi tensile strength)
- Dirt shedding fenders both sides.
- Rear hinge has stainless steel pins and greaseless composite bushings
- Stainless steel long sills
- Stainless steel rear bolsters
- Stainless steel underbody pans
- Air tailgate release (electric over air control) ~~on front of body~~
- D667K pintle chain conveyor with 1/2" x 1 1/2" cross boars on every link (double conveyor cross bars)
- Fold up ladder installed (location TBD)
- AR400 conveyor cover
- Two extra oval light holes with 12 volt LED flashers installed and LED back-up lights. Also includes LED stop/turn/tail and FMVSS 108 clearance lights. Will use one piece wiring harness which includes ends for all rear lighting on body.
- 16" x 84" cab shield (100% welded to front of cab shield).
- Four LED amber warning flashers installed in cab shield, 2 face forward, 1 each side. Installed in fully enclosed boxes.

The Dependable Ones



Henderson Manufacturing, Inc.

916 SOUTH 10TH STREET MANCHESTER, IA 52057 • 888/360-7483 • FAX 563/927-7001

- Plow lights (Hella model 220) installed with stainless steel hood mounted brackets
- Back-up alarm installed
- Rear pintle plate with "D" rings. (NO pintle hook)(chassis to have trailer electrical to the rear for trailer plug if required)
- Covers on underside of rear bolsters (to protect air tailgate canisters)
- Front anti-sail and rear mud flaps installed
- Body to be sand blasted, powder primed, and powder finish painted one color non-metallic

Henderson Front Low Profile Quick Hitch, 30.5"

- Includes 3" x 10" lift cylinder
- Cheek plate mounted to truck frame
- Includes plow portion quick hitch (30.5")
- Quick couplers to front for reversible snow plow
- DOES NOT INCLUDE FRONT REVERSIBLE SNOW PLOW

Hydraulic control system

- 6.0 CIR load sense front crank shaft driven pump with manual shut off valve.
- 30 gallon cradle mounted tank with in tank filter and cradle mount valve enclosure (mounted between body and cab above frame rails)
- Cable controls for dump and front snow plow (2-axis cable plow control or two separate levers same price)
- Force 5100EX spreader control to control conveyor and spinner
- Lighting / wiring package installed as specified using existing chassis switches

Package Price as Described above = \$ 43,122each

Price includes delivery to Mount Vernon Shop

Additional Options to Consider:

- Stainless steel sides and ends on body. Includes stainless steel ladder and cab shield. All bracing and external tailgate hardware would be stainless steel. Body would not be painted. Tank and valve enclosure remain standard mild steel

Add \$ 5,830

Lead time = 8-10 weeks ARO for equipment/hydraulics, installation complete within 45-90 days after completion of equipment and delivery of chassis.

Payment terms = net due 30 days after delivery of completed unit.


This quotation is valid for 45 days.

Please sign, date, and return giving your acceptance of this proposal:

Signed - _____

Date - _____


The Dependable Ones

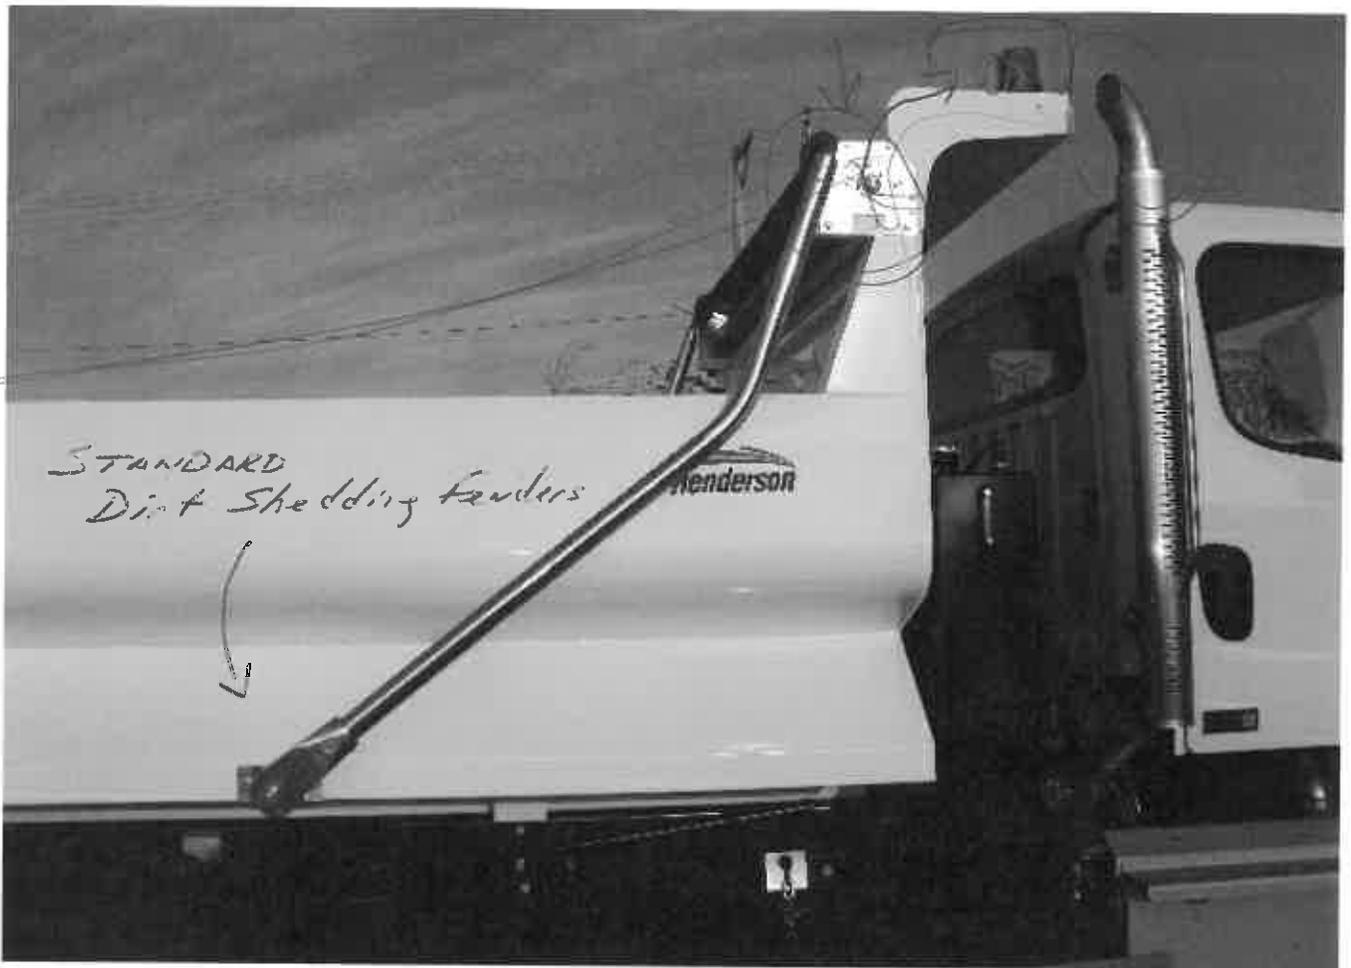



Cradle Mount Tank + Valve Enclosure





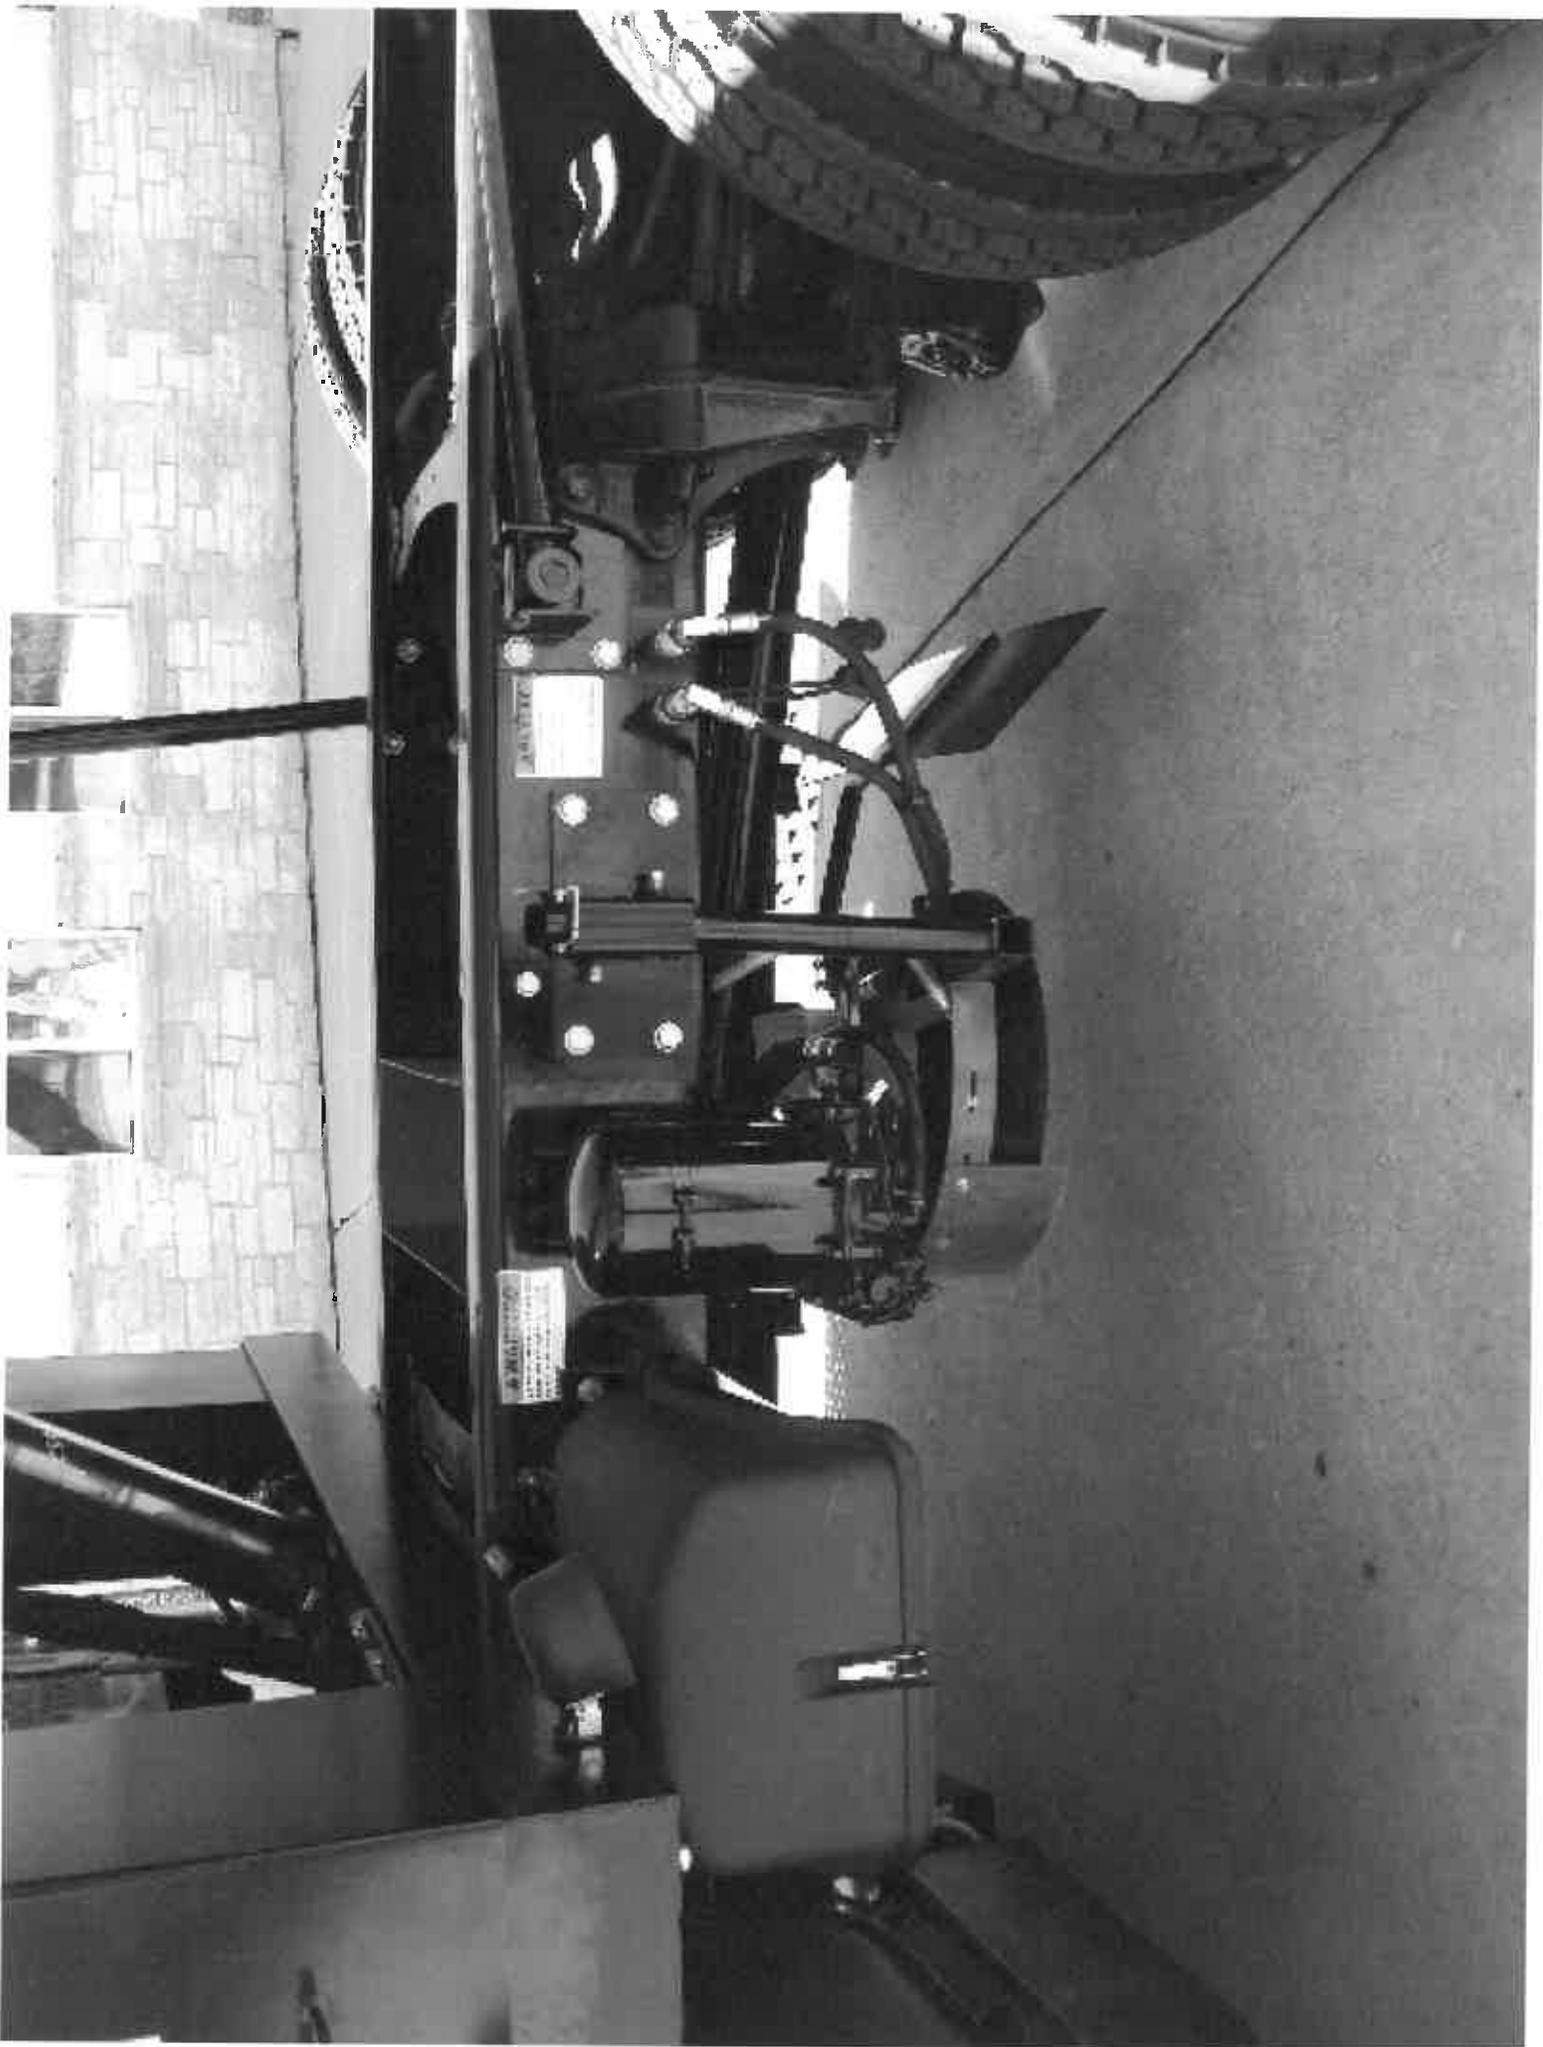


FRONT CENTER DISCHARGE CHUTE LOCATION

FRONT CENTER DISCHARGE UNITS ONLY!!!

NOTE: TRUCK FRAME RAILS MUST BE FREE OF OBSTRUCTIONS IN AREA NOTED BELOW. THIS MAY MEAN THAT CHASSIS CROSS MEMBERS AND/OR DRIVE SHAFT BEARING SUPPORTS NEED TO BE MOVED IN ORDER TO ALLOW FOR PROPER CENTER CHUTE INSTALLATION.

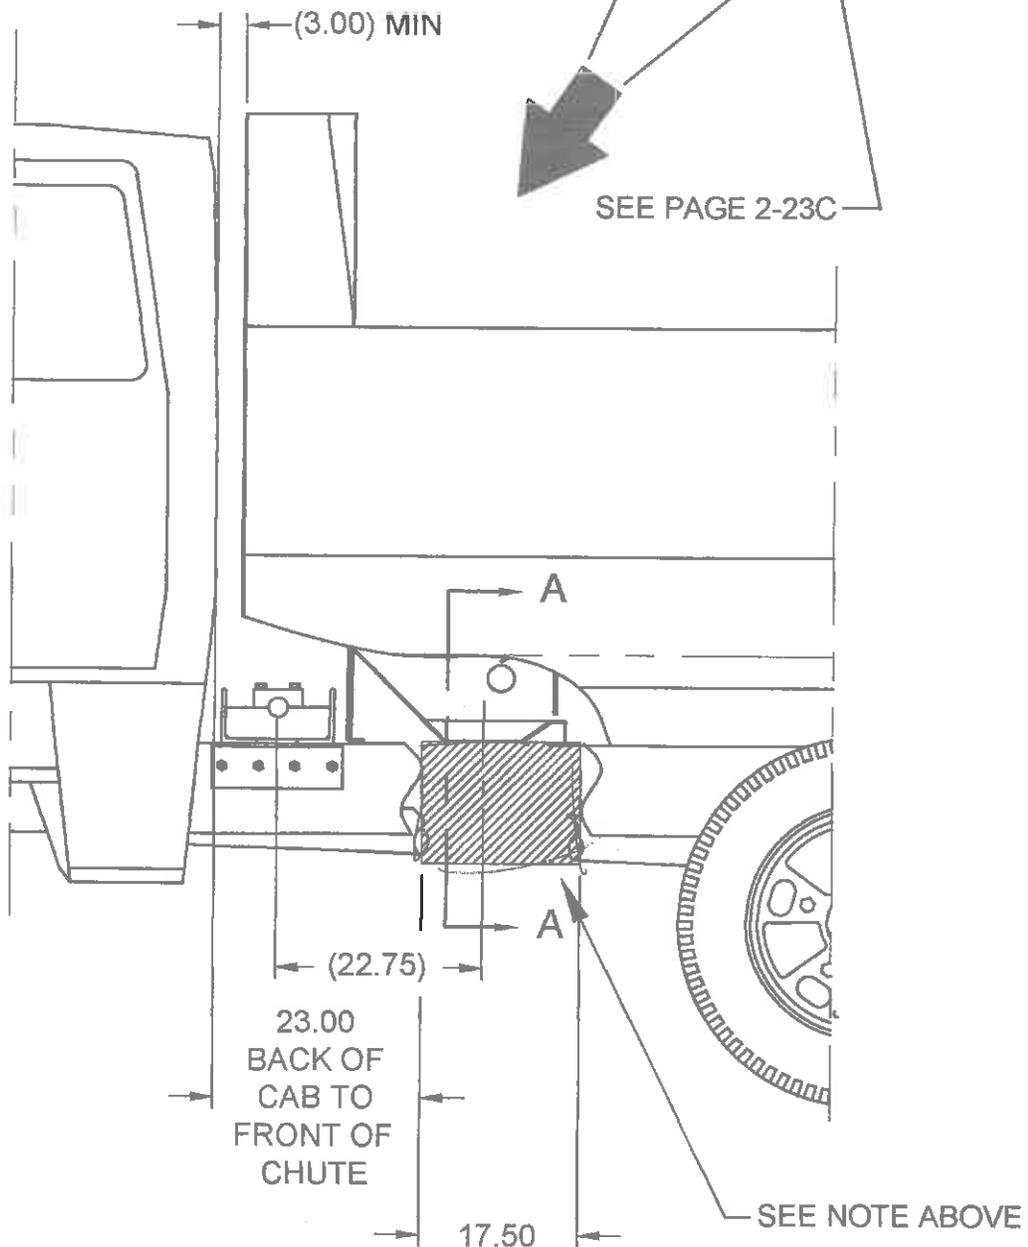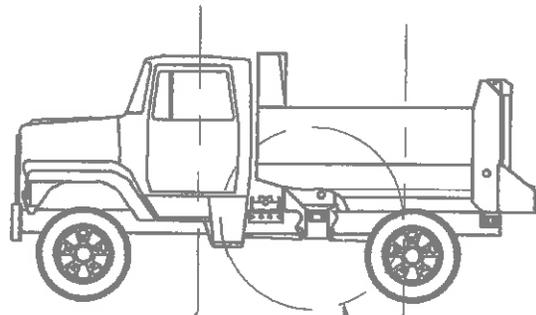

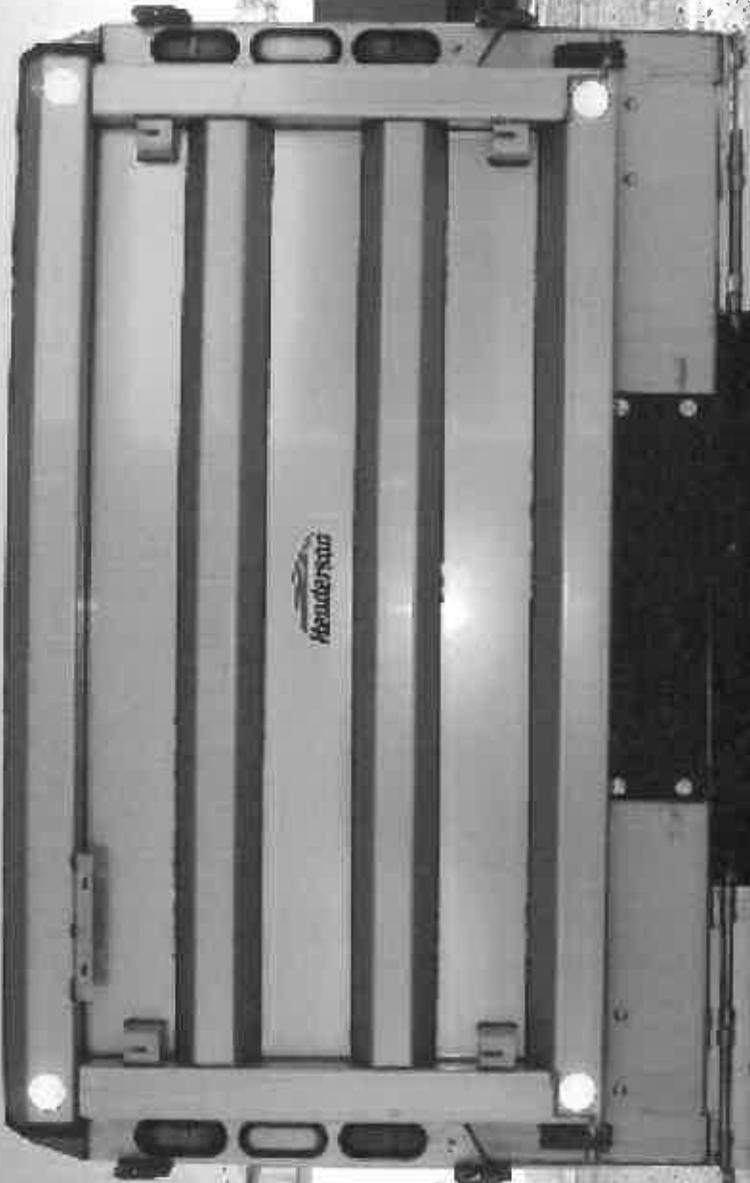

Henderson
Truck Equipment
TOWN
1-800-360-1483

Henderson
Truck Equipment
TOWN
1-800-360-1483

